


2SC4375U

NPN Silicon Epitaxial Planar Transistor

High current application



1.Base 2.Collector 3.Emitter
SOT-89 Plastic Package


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)








Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	30	V
Collector Emitter Voltage	V_{CEO}	30	V
Emitter Base Voltage	V_{EBO}	5	V
Collector Current	I_C	1.5	A
Total Power Dissipation	P_{tot}	0.5 1 ¹⁾	W
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{Stg}	- 55 to + 150	$^\circ\text{C}$

¹⁾ When mounted on a 250 mm² x 0.8 t ceramic substrate.

Characteristics at $T_a = 25^\circ\text{C}$


Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 2\text{ V}$, $I_C = 500\text{ mA}$	h_{FE} h_{FE}	100	-	200	-
Current Gain Group O Y		160	-	320	-
Collector Base Breakdown Voltage at $I_C = 1\text{ mA}$	$V_{(BR)CBO}$	30	-	-	V
Collector Emitter Breakdown Voltage at $I_C = 10\text{ mA}$	$V_{(BR)CEO}$	30	-	-	V
Emitter Base Breakdown Voltage at $I_E = 1\text{ mA}$	$V_{(BR)EBO}$	5	-	-	V
Collector Cutoff Current at $V_{CB} = 30\text{ V}$	I_{CBO}	-	-	100	nA
Emitter Cutoff Current at $V_{EB} = 5\text{ V}$	I_{EBO}	-	-	100	nA
Collector Emitter Saturation Voltage at $I_C = 1.5\text{ A}$, $I_B = 30\text{ mA}$	$V_{CE(sat)}$	-	-	2	V
Base Emitter Voltage at $V_{CE} = 2\text{ V}$, $I_C = 500\text{ mA}$	V_{BE}	-	-	1	V
Transition Frequency at $V_{CE} = 2\text{ V}$, $I_C = 500\text{ mA}$	f_T	-	120	-	MHz
Collector Output Capacitance at $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{ob}	-	-	40	pF



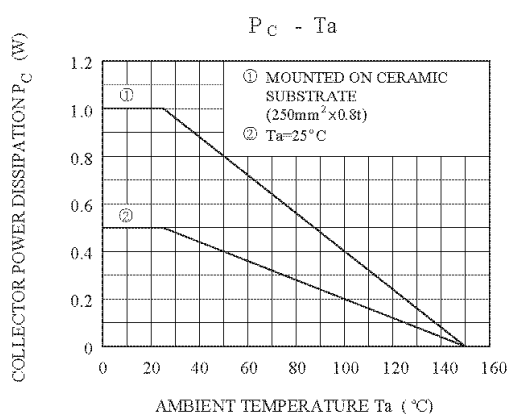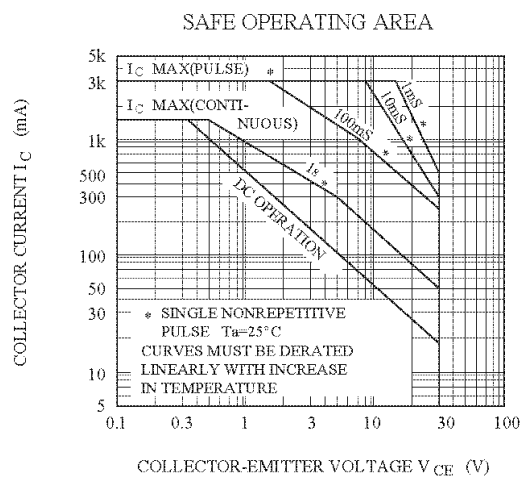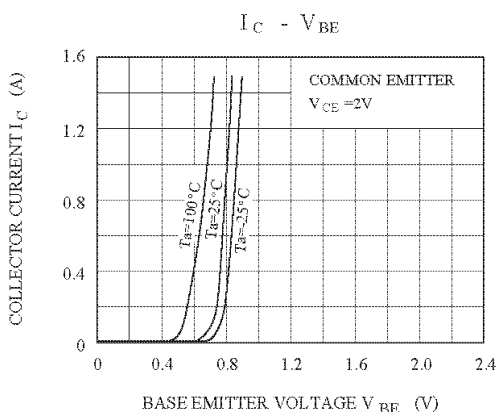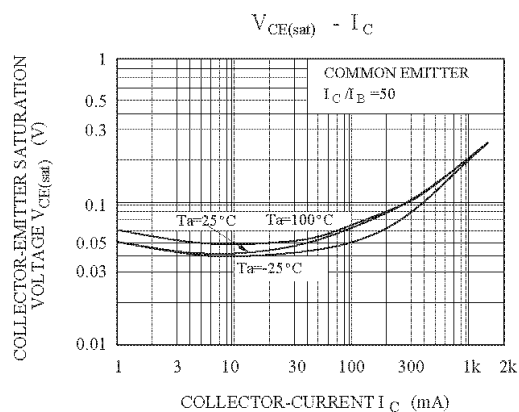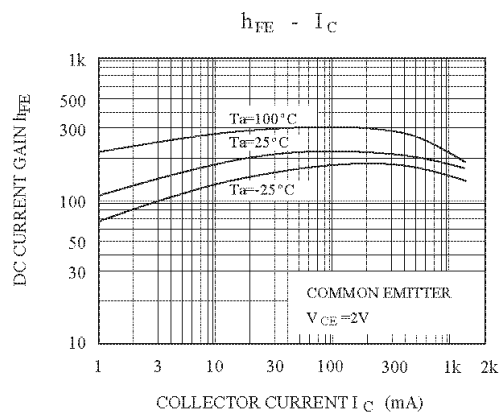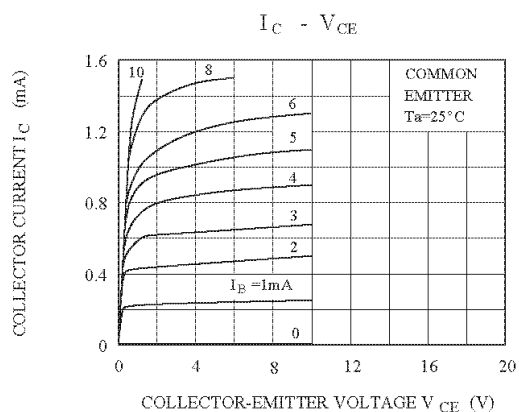

2SC4375U

SOT-89 PACKAGE OUTLINE

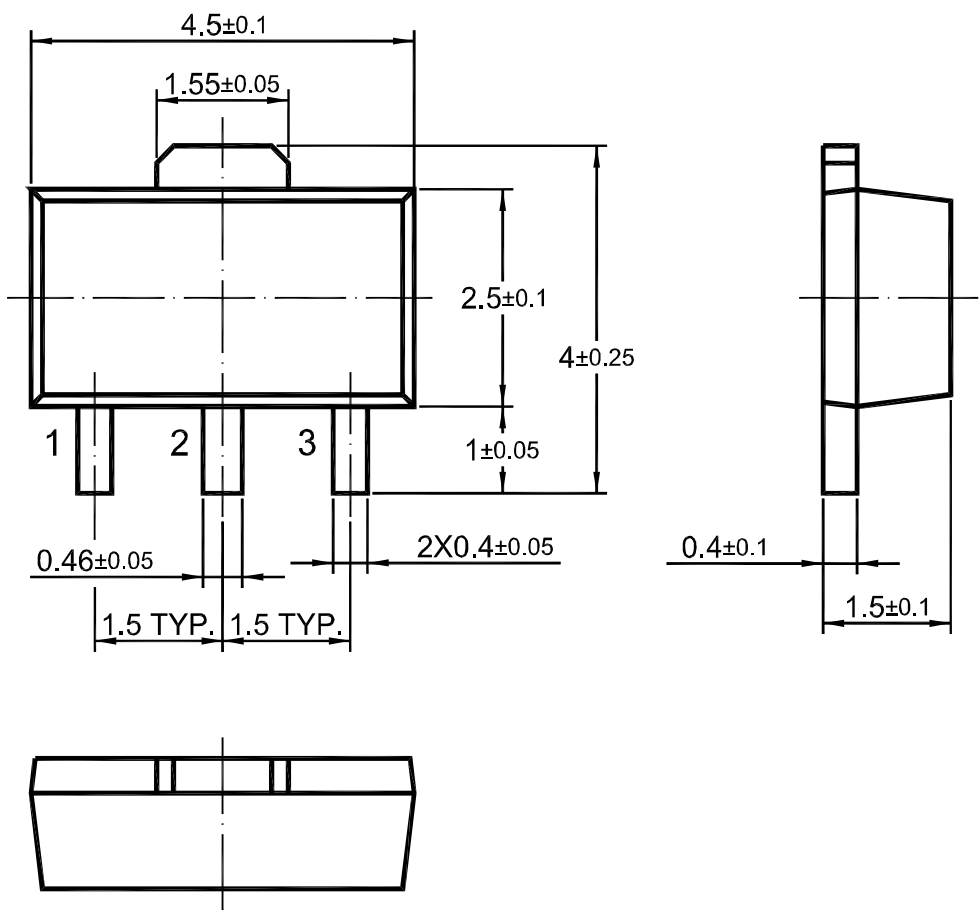

Dimensions in mm

