

BAS70W1


Surface Mount Schottky Barrier Diode

Features

- Low turn-on voltage
- Fast switching

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

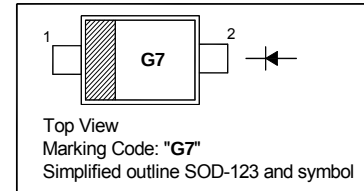







Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	70	V
Non-Repetitive Peak Reverse Voltage	V_{RSM}	70	V
Maximum DC Blocking Voltage	V_R	70	V
Average Forward Rectified Current	$I_{F(AV)}$	70	mA
Peak Forward Surge Current ($t < 10$ ms)	I_{FSM}	100	mA
Power Dissipation	P_D	200	mW
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	625	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_j	- 55 to + 125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 10 \mu\text{A}$	$V_{(BR)R}$	70	-	V
Forward Voltage at $I_F = 1$ mA at $I_F = 15$ mA	V_F	- -	0.41 1	V
Reverse Current at $V_R = 50$ V	I_R	-	100	nA
Total Capacitance at $V_R = 0$, $f = 1$ MHz	C_T	-	2	pF
Reverse Recovery Time at $I_F = I_R = 10$ mA to $I_R = 1$ mA, $R_L = 100 \Omega$	t_{rr}	-	5	ns



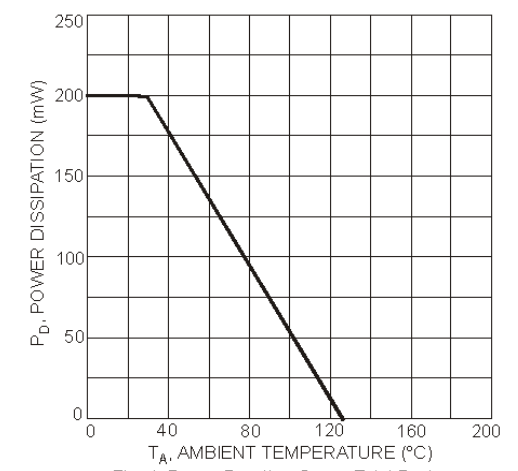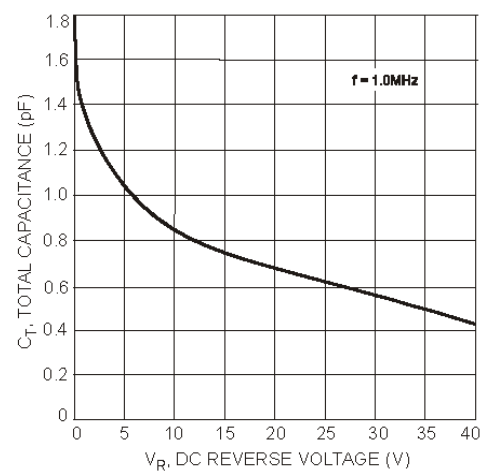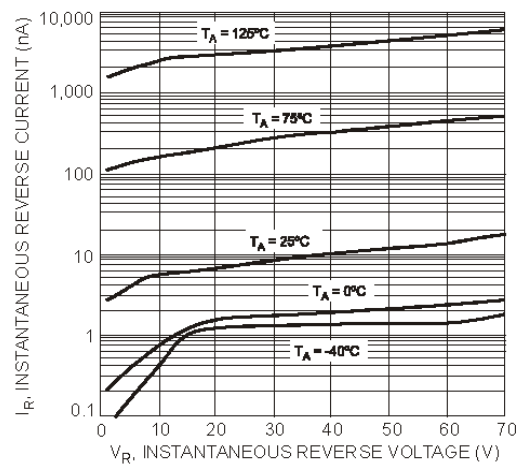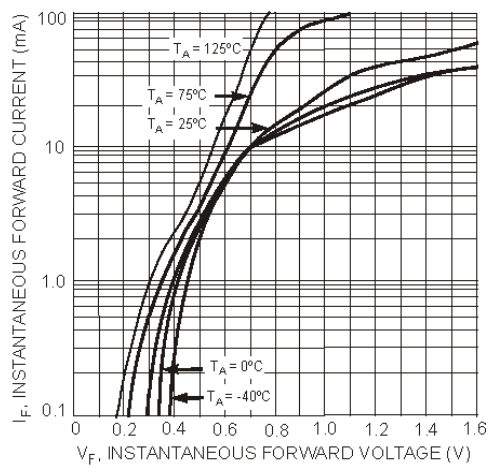


BAS70W1

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123

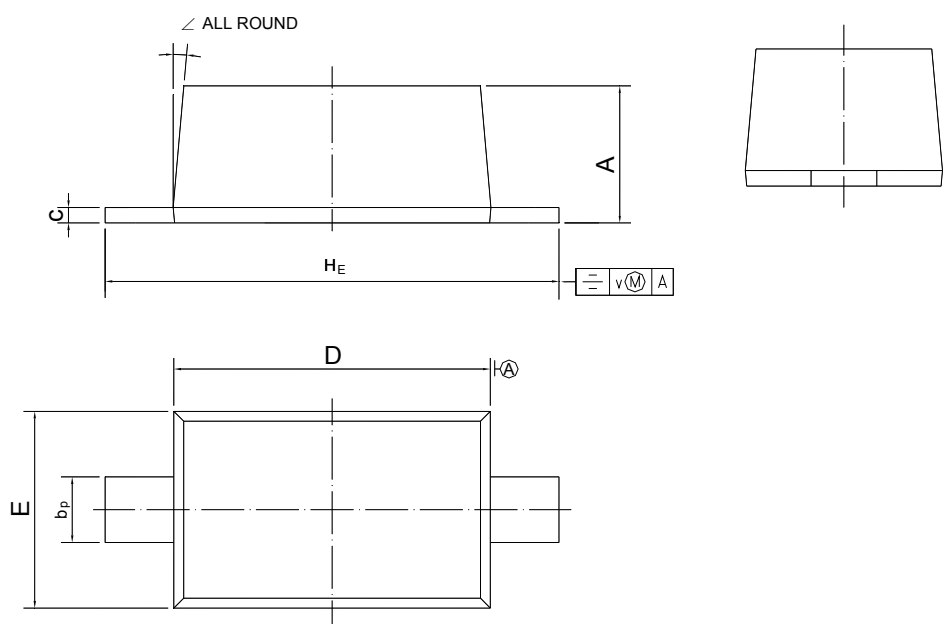

UNIT	A	b _p	c	D	E	H _E	v	∠
mm	1.15 1.05	0.6 0.5	0.135 0.100	2.7 2.6	1.65 1.55	3.85 3.55	0.2	5°

