


MMTL431 / A

Programmable Precision Reference

Features:

- Programmable output Voltage to 36 V
- Low dynamic output impedance
- Sink current capability of 1 to 100 mA
- Low output noise voltage
- Fast turn on response



1. Reference 2.Cathode 3. Anode
TO-236 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$, unless otherwise noted.)

Parameter	Symbol	Value	Unit
Cathode Voltage	V_{KA}	37	V
Cathode Current Range (Continuous)	I_{KA}	- 100 to + 150	mA
Reference Input Current Range	I_{REF}	- 0.05 to + 10	mA
Power Dissipation	P_D	350	mW
Operating Temperature Range	T_{opr}	- 40 to + 85	$^\circ\text{C}$
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 150	$^\circ\text{C}$

Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Unit
Cathode Voltage	V_{KA}	V_{REF}	36	V
Cathode Current	I_{KA}	1	100	mA

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
Reference Input Voltage at $V_{KA} = V_{REF}$, $I_{KA} = 10\text{ mA}$ MMTL431 MMTL431A	V_{REF}	2.44 2.48	2.495 2.495	2.55 2.51	V
Deviation of Reference Input Voltage Over Temperature at $V_{KA} = V_{REF}$, $I_{KA} = 10\text{ mA}$, $-25^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$	$\Delta V_{REF}/\Delta T$	-	4.5	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage at $I_{KA} = 10\text{ mA}$ $\Delta V_{KA} = 10\text{ V to } V_{REF}$ $\Delta V_{KA} = 36\text{ V to } 10\text{ V}$	$\Delta V_{REF}/\Delta V_{KA}$	- -	-1.0 -0.5	-2.7 -2	mV/V
Reference Input Current at $I_{KA} = 10\text{ mA}$, $R1 = 10\text{ K}\Omega$, $R2 = \infty$	I_{REF}	-	1.5	4	μA
Deviation of Reference Input Current Over Full Temperature at $I_{KA} = 10\text{ mA}$, $R1 = 10\text{ K}\Omega$, $R2 = \infty$, $-25^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$	$\Delta I_{REF}/\Delta T$	-	0.4	1.2	μA
Minimum Cathode Current for Regulation at $V_{KA} = V_{REF}$	$I_{KA(min)}$	-	0.45	1	mA
Off-Stage Cathode Current at $V_{KA} = 36\text{ V}$, $V_{REF} = 0$	$I_{KA(OFF)}$	-	0.05	1	μA
Dynamic Impedance at $V_{KA} = V_{REF}$, $I_{KA} = 1\text{ to }100\text{ mA}$, $f \leq 1\text{ KHz}$	Z_{KA}	-	0.15	0.5	Ω




Fig 1 Cathode Current
Vs Cathode Voltage

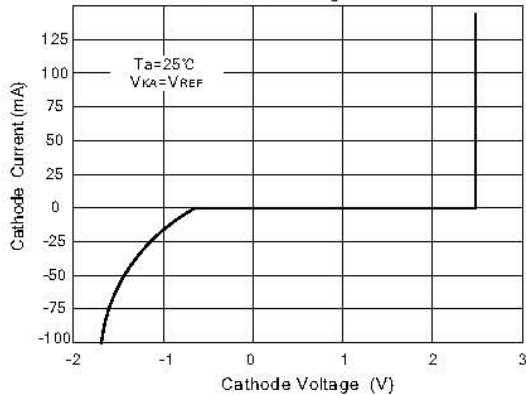


Fig 2 Cathode Current
Vs Cathode Voltage

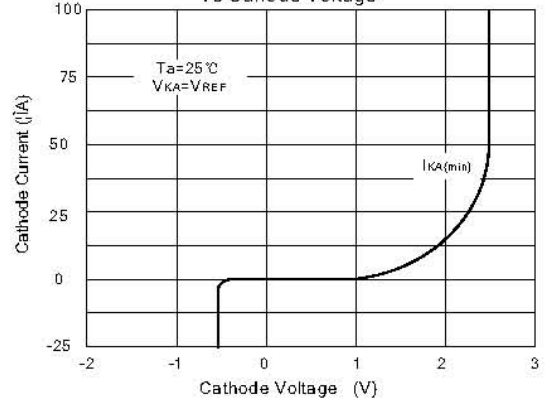


Fig 3 Change in Reference Input
Voltage Vs Cathode voltage

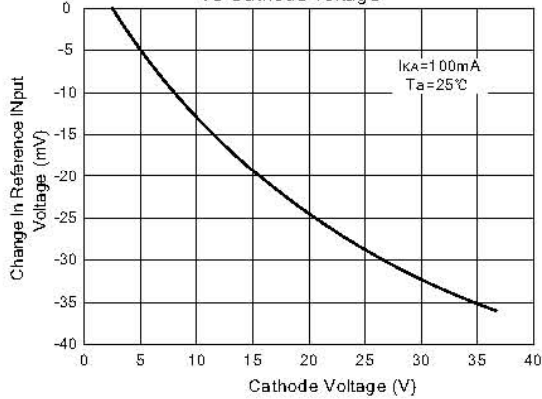


Fig 4 Pulse Response

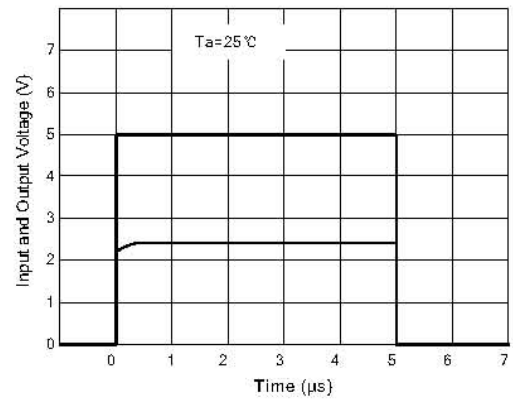


Fig 5 Dynamic Impedance
Vs Frequency





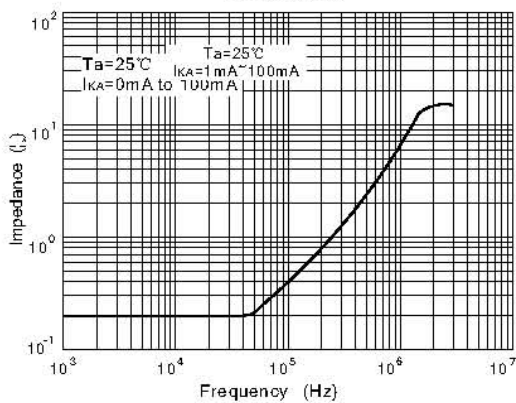


Fig 6 Small Signal Voltage
Amplification Vs Frequency

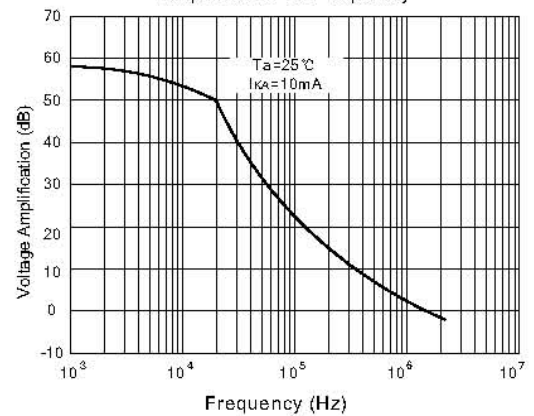

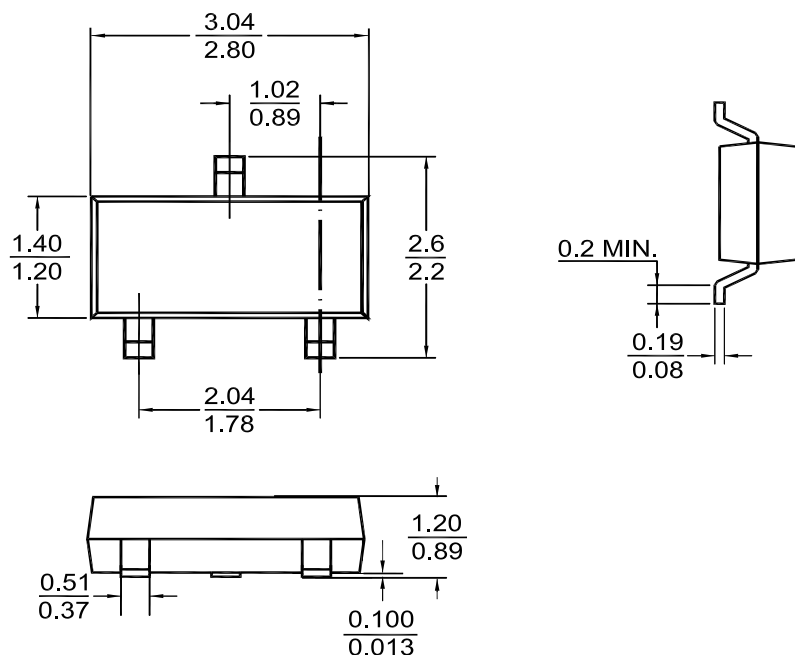

Recommended Soldering Footprint

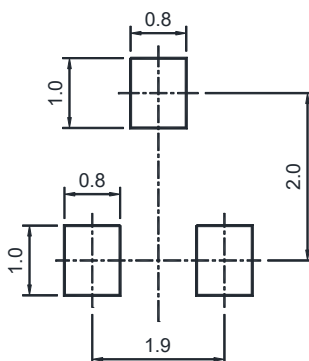

Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
TO-236	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" ** " = Part No.
 " YM " = Date Code Marking
 " Y " = Year
 " M " = Month
 Font type: Arial

