

WTM304P190LS-AH



P-Channel Enhancement Mode MOSFET

Features

- AEC-Q101 Qualified
- Halogen and Antimony Free(HAF), RoHS compliant

Applications

- Motor Drive
- Synchronus Rectification in DC/DC and AC/DC Converters

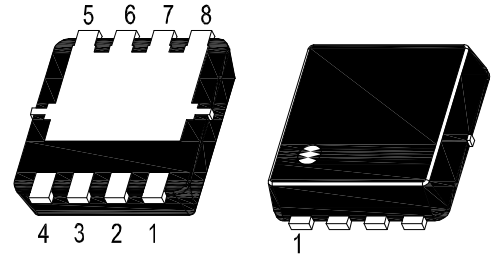

1. Source 2. Source 3. Source 4. Gate
5. Drain 6. Drain 7. Drain 8. Drain
DFN3030 Plastic Package

Key Parameters

Parameter	Value	Unit
$-BV_{DS}$	40	V
$R_{DS(ON)}$ Max	19 @ $-V_{GS} = 10$ V	m Ω
	29 @ $-V_{GS} = 4.5$ V	m Ω
$-V_{GS(th)}$ typ	1.5	V
Q_g typ	42 @ $-V_{GS} = 10$ V	nC

Absolute Maximum Ratings (at $T_a = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$-V_{DS}$	40	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current	$-I_D$	30	A
$T_c = 25^\circ\text{C}$		19	
$T_c = 100^\circ\text{C}$			
Peak Drain Current, Pulsed ¹⁾	$-I_{DM}$	120	A
Single-Pulse Avalanche Current	$-I_{AS}$	33	A
Single-Pulse Avalanche Energy ²⁾	E_{AS}	54	mJ
Power Dissipation	P_D	25	W
$T_c = 25^\circ\text{C}$			
Operating Junction and Storage Temperature Range	T_J, T_{stg}	- 55 to + 150	$^\circ\text{C}$


Thermal Characteristics

Parameter	Symbol	Max.	Unit
Thermal Resistance from Junction to Case	$R_{\theta JC}$	5	$^\circ\text{C/W}$
Thermal Resistance from Junction to Ambient ³⁾	$R_{\theta JA}$	50	$^\circ\text{C/W}$

¹⁾ Pulse Test: Pulse Width ≤ 100 μs , Duty Cycle $\leq 2\%$, Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)} = 150^\circ\text{C}$.

²⁾ Limited by $T_{J(MAX)}$, starting $T_J = 25^\circ\text{C}$, $L = 0.1$ mH, $R_g = 25$ Ω , $-I_D = 33$ A, $V_{GS} = 10$ V.


³⁾ Device mounted on FR-4 substrate PC board, 2oz copper, with 1-inch square copper plate in still air.



WTM304P190LS-AH

Characteristics at $T_a = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit
STATIC PARAMETERS					
Drain-Source Breakdown Voltage at $-I_D = 250\ \mu\text{A}$	$-BV_{DS}$	40	-	-	V
Drain-Source Leakage Current at $-V_{DS} = 32\ \text{V}$	$-I_{DSS}$	-	-	1	μA
Gate Leakage Current at $V_{GS} = \pm 20\ \text{V}$	I_{GSS}	-	-	± 100	nA
Gate-Source Threshold Voltage at $V_{DS} = V_{GS}$, $-I_D = 250\ \mu\text{A}$	$-V_{GS(th)}$	1.2	-	2.5	V
Drain-Source On-State Resistance at $-V_{GS} = 10\ \text{V}$, $-I_D = 10\ \text{A}$ at $-V_{GS} = 4.5\ \text{V}$, $-I_D = 8\ \text{A}$	$R_{DS(on)}$	- -	15 -	19 29	m Ω
DYNAMIC PARAMETERS					
Gate resistance at $V_{DS} = 0\ \text{V}$, $f = 1\ \text{MHz}$	R_g	-	5.1	-	Ω
Forward Transconductance at $-V_{DS} = 5\ \text{V}$, $-I_D = 5\ \text{A}$	g_{fs}	-	15	-	S
Input Capacitance at $-V_{DS} = 20\ \text{V}$, $V_{GS} = 0\ \text{V}$, $f = 1\ \text{MHz}$	C_{iss}	-	2573	-	pF
Output Capacitance at $-V_{DS} = 20\ \text{V}$, $V_{GS} = 0\ \text{V}$, $f = 1\ \text{MHz}$	C_{oss}	-	174	-	pF
Reverse Transfer Capacitance at $-V_{DS} = 20\ \text{V}$, $V_{GS} = 0\ \text{V}$, $f = 1\ \text{MHz}$	C_{rss}	-	111	-	pF
Total Gate Charge at $-V_{GS} = 10\ \text{V}$, $-V_{DS} = 20\ \text{V}$, $-I_D = 10\ \text{A}$ at $-V_{GS} = 4.5\ \text{V}$, $-V_{DS} = 20\ \text{V}$, $-I_D = 10\ \text{A}$	Q_g	- -	42 19	- -	nC
Gate-Source Charge at $-V_{GS} = 10\ \text{V}$, $-V_{DS} = 20\ \text{V}$, $-I_D = 10\ \text{A}$	Q_{gs}	-	8.5	-	nC
Gate-Drain Charge at $-V_{GS} = 10\ \text{V}$, $-V_{DS} = 20\ \text{V}$, $-I_D = 10\ \text{A}$	Q_{gd}	-	5.5	-	nC
Turn-On Delay Time at $-V_{DD} = 20\ \text{V}$, $-V_{GS} = 10\ \text{V}$, $-I_D = 10\ \text{A}$, $R_g = 3.3\ \Omega$	$t_{d(on)}$	-	14	-	nS
Turn-On Rise Time at $-V_{DD} = 20\ \text{V}$, $-V_{GS} = 10\ \text{V}$, $-I_D = 10\ \text{A}$, $R_g = 3.3\ \Omega$	t_r	-	26	-	nS
Turn-Off Delay Time at $-V_{DD} = 20\ \text{V}$, $-V_{GS} = 10\ \text{V}$, $-I_D = 10\ \text{A}$, $R_g = 3.3\ \Omega$	$t_{d(off)}$	-	27	-	nS
Turn-Off Fall Time at $-V_{DD} = 20\ \text{V}$, $-V_{GS} = 10\ \text{V}$, $-I_D = 10\ \text{A}$, $R_g = 3.3\ \Omega$	t_f	-	5	-	nS
Body-Diode PARAMETERS					
Drain-Source Diode Forward Voltage at $-I_S = 1\ \text{A}$, $V_{GS} = 0\ \text{V}$	$-V_{SD}$	-	-	1.2	V
Body-Diode Continuous Current	$-I_S$	-	-	30	A
Body-Diode Continuous Current, Pulsed	$-I_{SM}$	-	-	120	A
Body Diode Reverse Recovery Time at $-I_S = 10\ \text{A}$, $di/dt = 100\ \text{A} / \mu\text{s}$	t_{rr}	-	14.4	-	nS
Body Diode Reverse Recovery Charge at $-I_S = 10\ \text{A}$, $di/dt = 100\ \text{A} / \mu\text{s}$	Q_{rr}	-	9.4	-	nC



Electrical Characteristics Curves

Fig. 1 Typical Output Characteristic

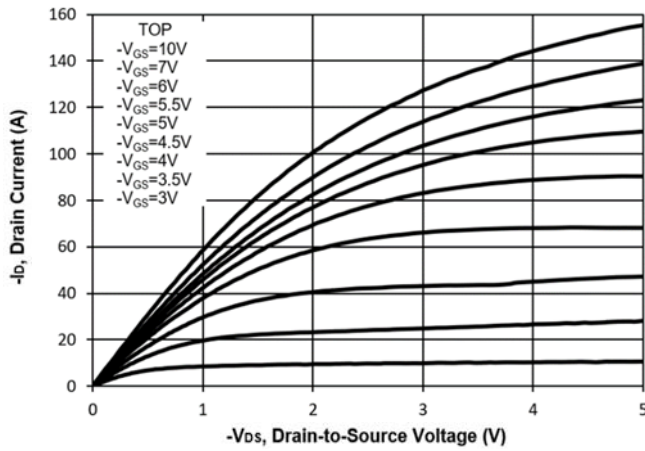


Fig. 2 Typical Transfer Characteristic

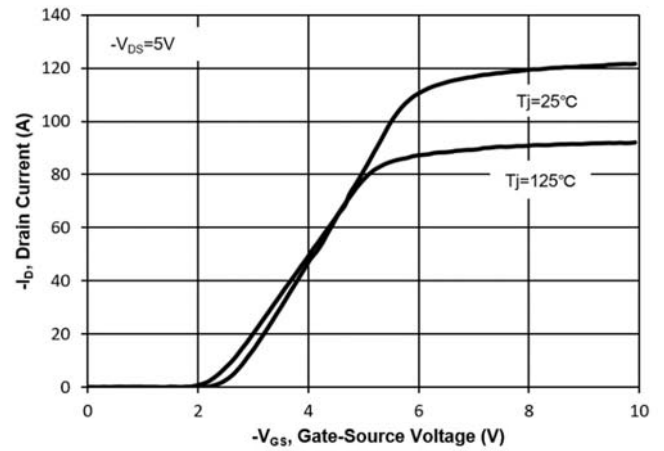


Fig. 3 on-Resistance vs Drain Current

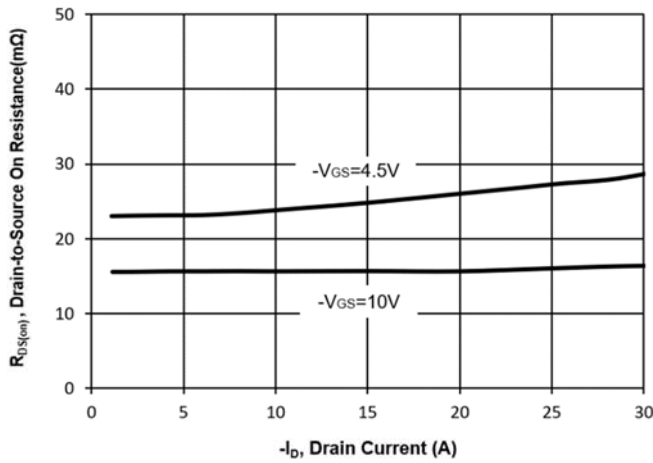


Fig. 4 on-Resistance vs. Gate Voltage

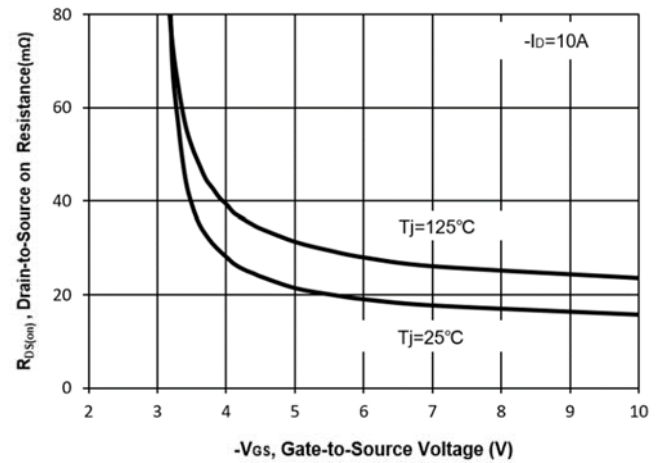


Fig. 5 on-Resistance vs. TJ


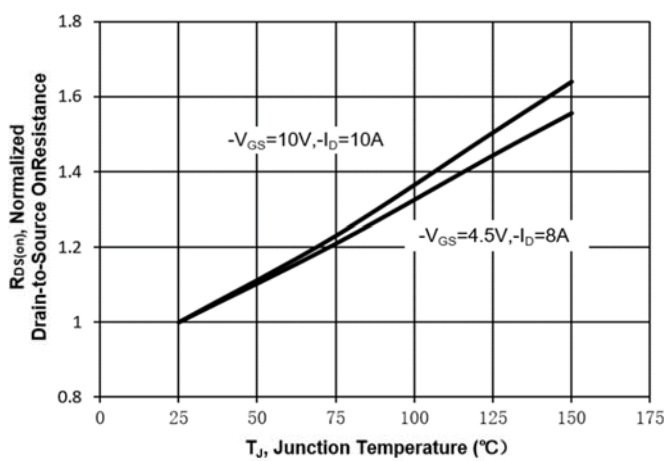


Fig. 6 Typical Body Diode Forward Characteristic

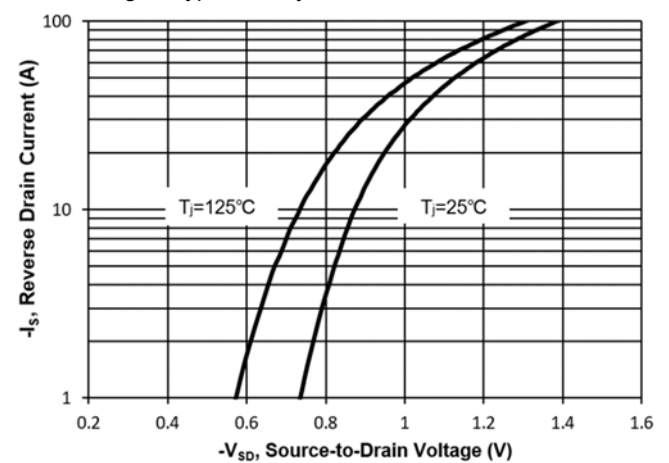

Electrical Characteristics Curves

Fig. 7 Typical Junction Capacitance

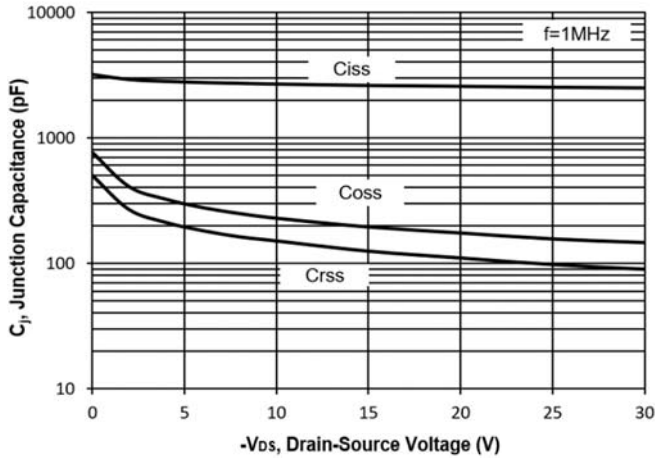


Fig. 8 Drain-Source Leakage Current vs. T_j

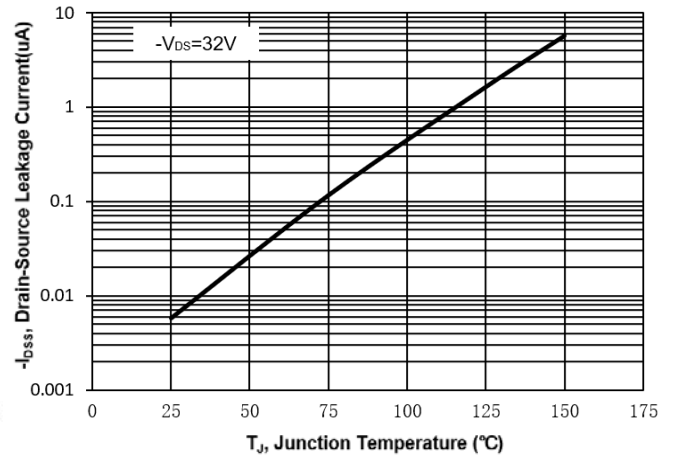


Fig. 9 $V_{(BR)DSS}$ vs. Junction Temperature

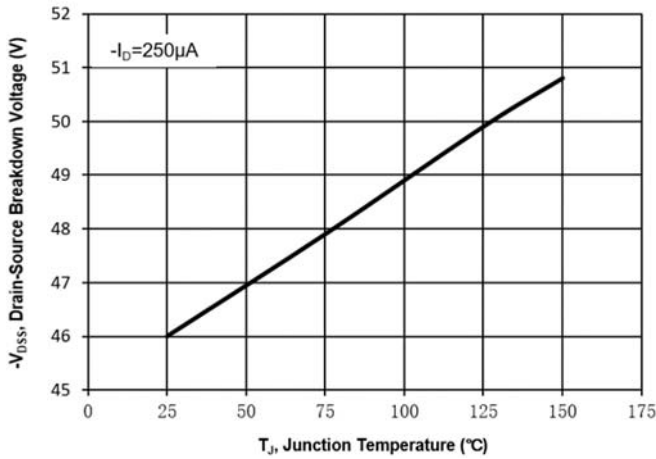


Fig. 10 Gate Threshold Variation vs. T_j

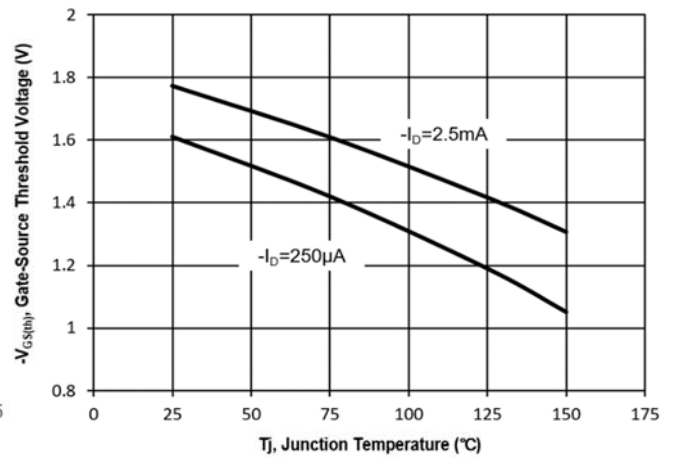


Fig. 11 Gate Charge


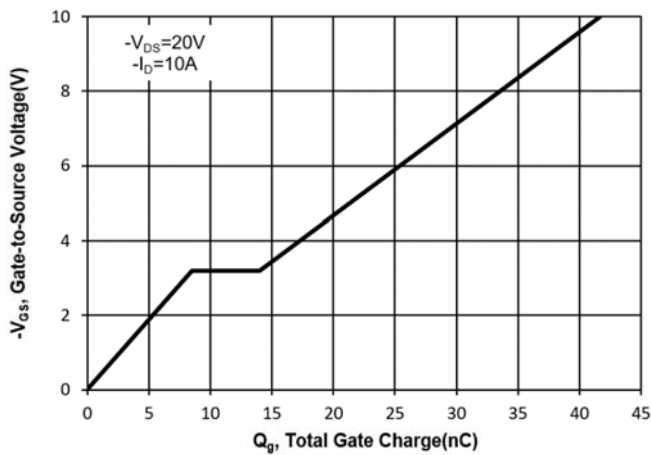


Fig. 12 Safe Operation Area

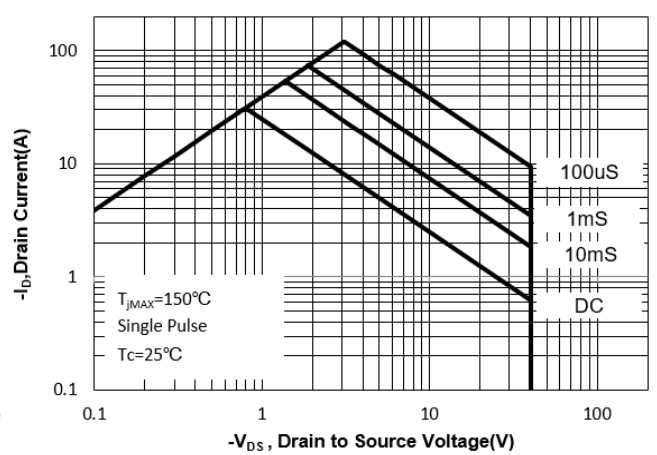

Electrical Characteristics Curves

Fig. 13 Normalized Maximum Transient Thermal Impedance($z_{\theta JC}$)



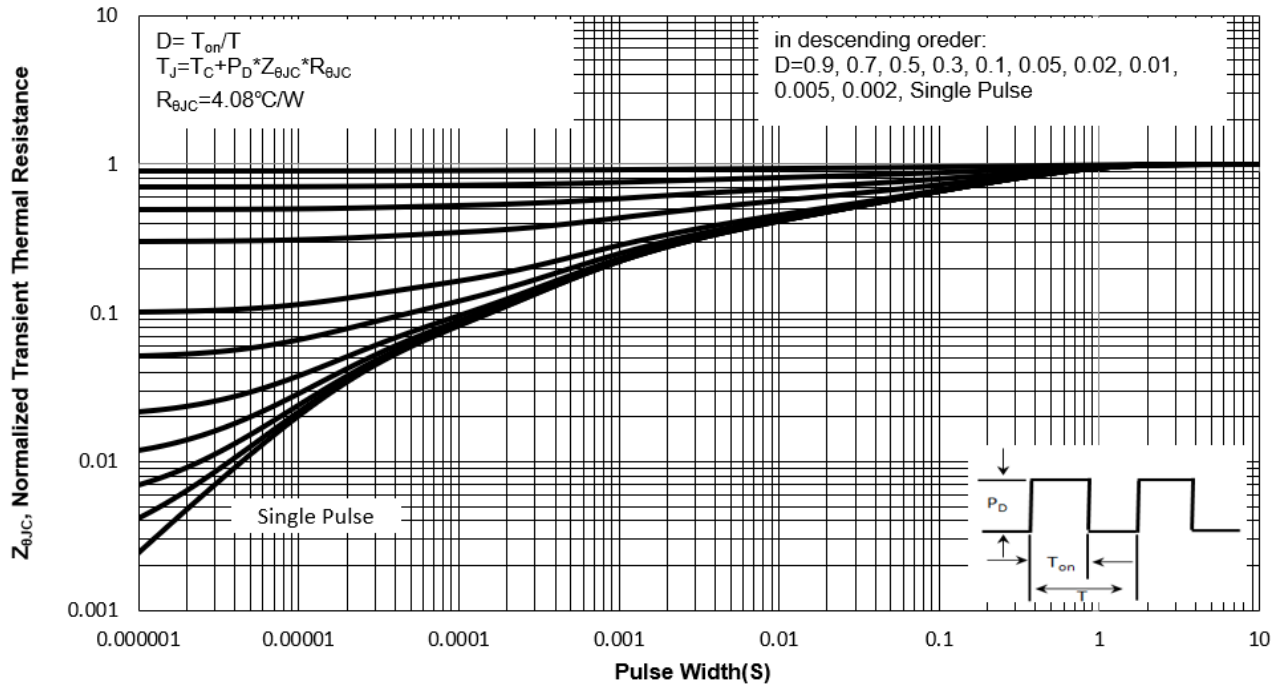


Fig. 14 Normalized Maximum Transient Thermal Impedance($z_{\theta JA}$)

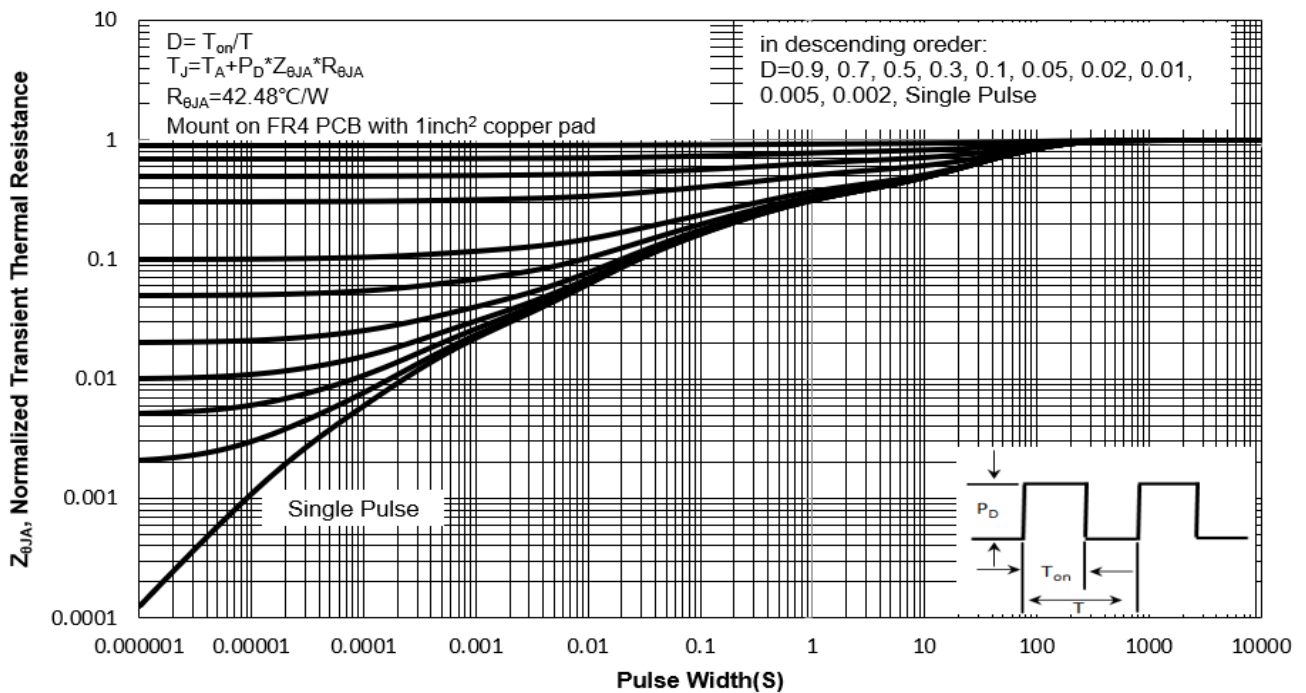

Test Circuits

Fig.1-1 Switching times test circuit

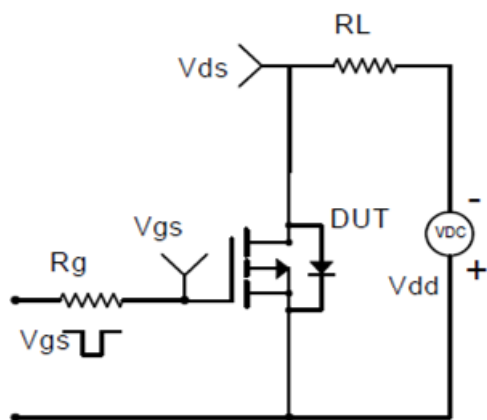


Fig.1-2 Switching Waveform

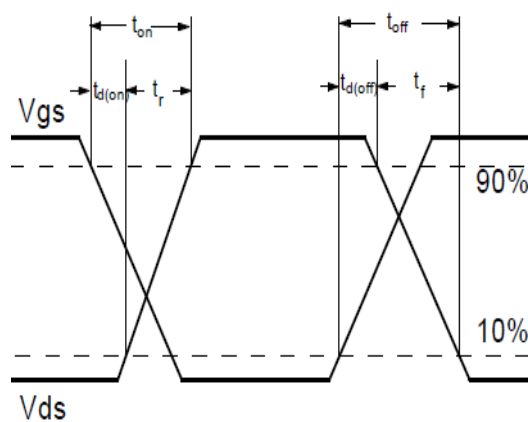


Fig.2-1 Gate charge test circuit

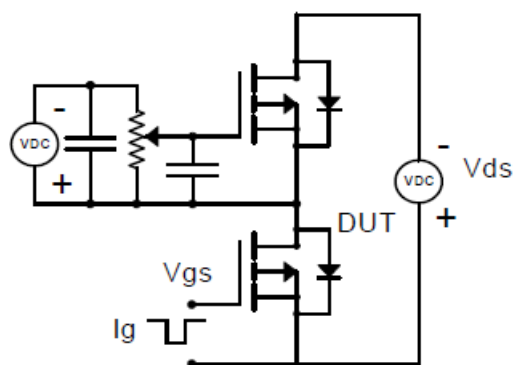


Fig.2-2 Gate charge waveform

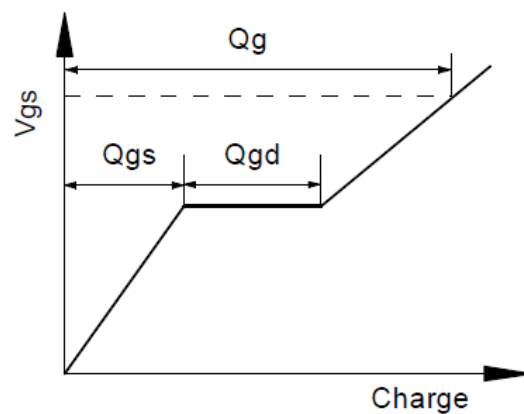


Fig.3-1 Avalanche test circuit



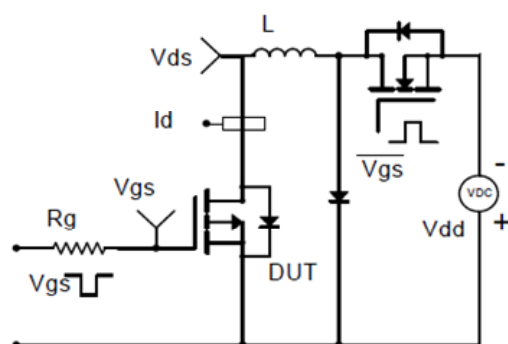



Fig.3-2 Avalanche waveform

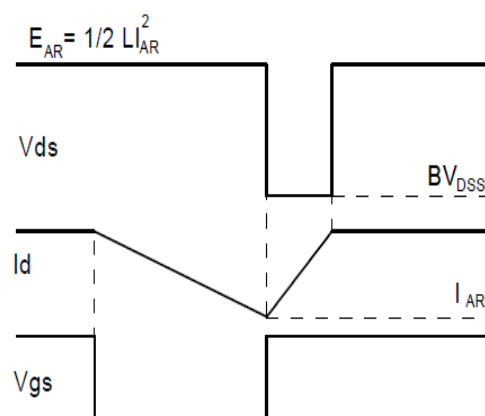

WTM304P190LS-AH

Package Outline Dimensions (Units: mm)


DFN3030

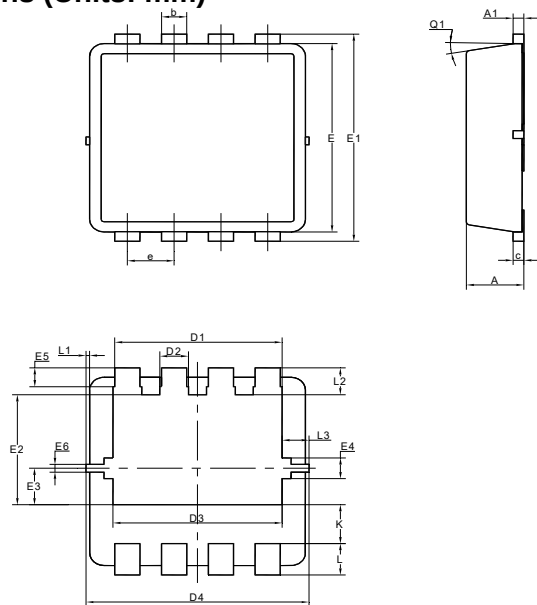

UNIT	A	A1	b	c	D	D1	D2	D3	D4	E	E1	E2	E3
mm	0.9	0.05	0.35	0.25	3.1	2.45	0.5	2.7	3.2	3.1	3.3	1.85	0.68
	0.7	0	0.24	0.1	2.9	2.25	0.3	2.5	3	2.9	3.1	1.65	0.48

UNIT	E4	E5	E6	e	K	L	L1	L2	L3	θ1
mm	0.43	0.4	0.175	0.7	0.72	0.5	0.1	0.53	0.475	12°
	0.23	0.2	0.075	0.6	0.52	0.3	0	0.33	0.275	0°

Recommended Soldering Footprint

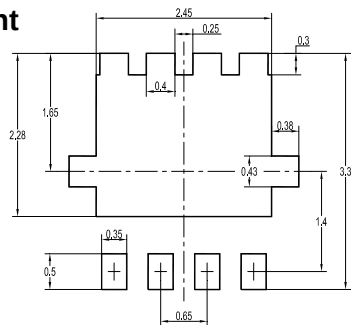

Packing information



Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
DFN3030	12	8 ± 0.1	0.315 ± 0.004	330	13	5,000

Marking information

" TM304P190LS " = Part No.

" ***** " = Date Code Marking

Font type: Arial



IMPORTANT NOTICE

Our company and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes to improve product design, functions and reliability without further notice to this document and any product described herein.

Statements described herein regarding the reliability and suitability of products is for illustrative purposes only. Products specifically described herein are not authorized for use as critical components in life support devices, automobile, military, aviation or aerospace only with the written approval of our company.

The information contained herein is presented only as guidance for product use. No license to any intellectual property rights is granted under this document. No responsibility is assumed by our company for any infringement of patents or any other intellectual property rights of third party that may result from the use of the product.

