


# 2SD1760U

## NPN Silicon Epitaxial Planar Transistor

Power Transistor



1.Base 2.Collector 3.Emitter  
SOT-89 Plastic Package


### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

| Parameter                               | Symbol    | Value         | Unit             |
|-----------------------------------------|-----------|---------------|------------------|
| Collector Base Voltage                  | $V_{CBO}$ | 60            | V                |
| Collector Emitter Voltage               | $V_{CEO}$ | 45            | V                |
| Emitter Base Voltage                    | $V_{EBO}$ | 5             | V                |
| Collector Current - DC                  | $I_C$     | 3             | A                |
| Collector Current - Pulse <sup>1)</sup> | $I_{CP}$  | 4.5           | A                |
| Collector Power Dissipation             | $P_C$     | 1             | W                |
| Junction Temperature                    | $T_J$     | 150           | $^\circ\text{C}$ |
| Storage Temperature Range               | $T_{Stg}$ | - 55 to + 150 | $^\circ\text{C}$ |

<sup>1)</sup> Single pulse,  $P_w = 100$  ms.

### Characteristics at $T_a = 25^\circ\text{C}$

| Parameter                                                                                 | Symbol        | Min. | Typ. | Max. | Unit          |
|-------------------------------------------------------------------------------------------|---------------|------|------|------|---------------|
| DC Current Gain<br>at $V_{CE} = 3$ V, $I_C = 0.5$ A<br><br>Current Gain Group P<br>Q<br>R | $h_{FE}$      | 82   | -    | 180  | -             |
|                                                                                           | $h_{FE}$      | 120  | -    | 270  | -             |
|                                                                                           | $h_{FE}$      | 180  | -    | 390  | -             |
|                                                                                           | $h_{FE}$      |      |      |      |               |
| Collector Cutoff Current<br>at $V_{CB} = 40$ V                                            | $I_{CBO}$     | -    | -    | 1    | $\mu\text{A}$ |
| Emitter Cutoff Current<br>at $V_{EB} = 4$ V                                               | $I_{EBO}$     | -    | -    | 1    | $\mu\text{A}$ |
| Collector Base Breakdown Voltage<br>at $I_C = 50$ $\mu\text{A}$                           | $V_{(BR)CBO}$ | 60   | -    | -    | V             |
| Collector Emitter Breakdown Voltage<br>at $I_C = 1$ mA                                    | $V_{(BR)CEO}$ | 45   | -    | -    | V             |
| Emitter Base Breakdown Voltage<br>at $I_E = 50$ $\mu\text{A}$                             | $V_{(BR)EBO}$ | 5    | -    | -    | V             |
| Collector Emitter Saturation Voltage<br>at $I_C = 2$ A, $I_B = 200$ mA                    | $V_{CE(sat)}$ | -    | -    | 1    | V             |
| Transition Frequency<br>at $V_{CE} = 5$ V, $-I_E = 0.5$ A, $f = 30$ MHz                   | $f_T$         | -    | 90   | -    | MHz           |
| Output Capacitance<br>at $V_{CB} = 10$ V, $f = 1$ MHz                                     | $C_{ob}$      | -    | 40   | -    | pF            |






Fig.1 Grounded emitter propagation characteristics

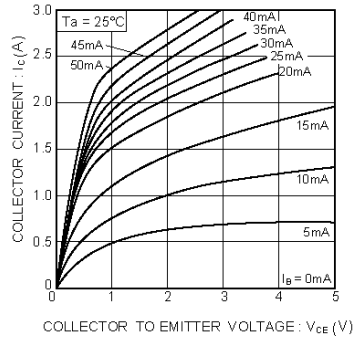


Fig.2 Grounded emitter output characteristics ( I )

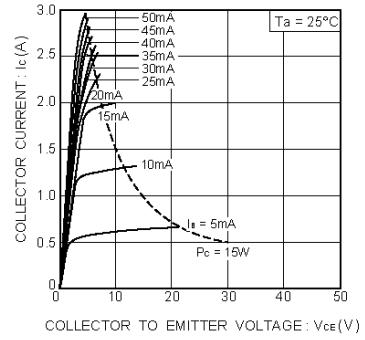


Fig.3 Grounded-emitter output characteristics( II )




Fig.4 DC current gain vs. collector current( I )




Fig.5 DC current gain vs. collector current( II )

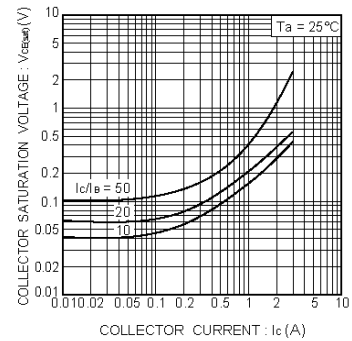


Fig.6 Collector-emitter saturation voltage vs. collector current

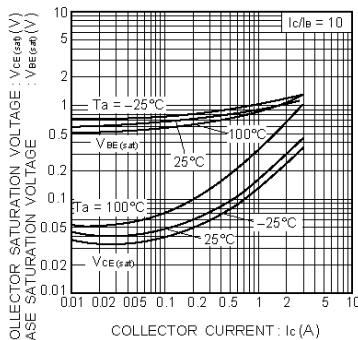


Fig.7 Collector-emitter saturation voltage vs. collector current Base-emitter saturation voltage vs. collector current

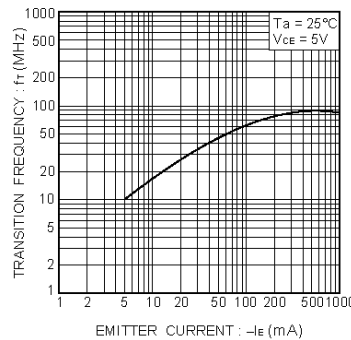


Fig.8 Gain bandwidth product vs. emitter current



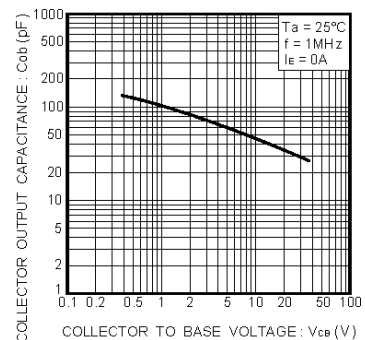


Fig.9 Collector output capacitance vs. collector-base voltage



2SD1760U

SOT-89 PACKAGE OUTLINE

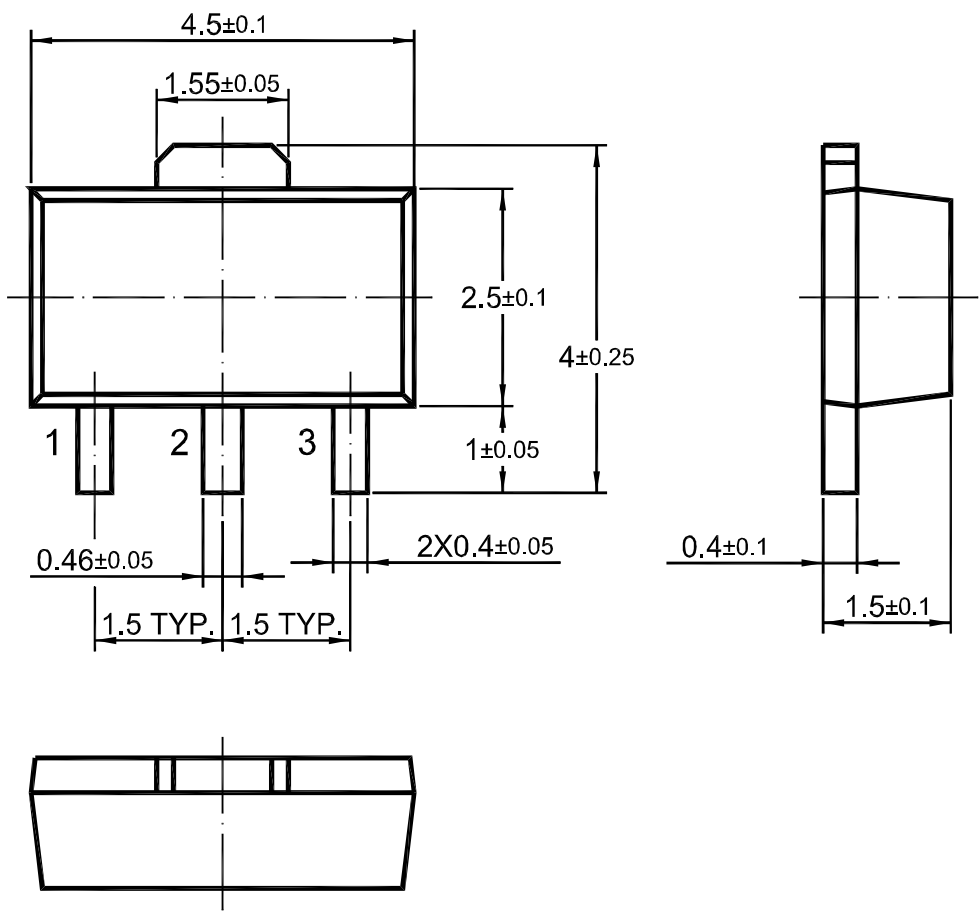

Dimensions in mm

